


VHM

NOWE NIŻSZE CENY



DIN-6527L

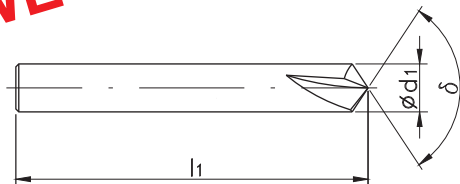

Zastosowanie					<65HRC	<65HRC	
Kąt wierzchołkowy δ					60°	90°	
Rodzaj materiału					VHM	VHM	
Rodzaj powłoki					TiAlN	TiAlN	
$\varnothing d_1, h6$	l_1	z	INDEX	W9-054011	W9-054012		
4,0	54	4	0400	72,00	72,00		
6,0	57	4	0600	88,00	88,00		
8,0	63	5	0800	120,00	120,00		
10,0	72	6	1000	155,00	155,00		
12,0	83	6	1200	230,00	230,00		
16,0	92	6	1600	345,00	345,00		
20,0	104	6	2000	475,00	475,00		

Przykład zamawiania:

Fazownik DIN-6527L 60° \varnothing 8,0 VHM, W9-054011-0800